



Powerful Magnetic Products Since 1899

Magnetic Head Pulleys

Engineering Driven
Customer Service Focused

www.dingsmagnets.com | magsales@dingsco.com
(414)672-7830

- ◇ Automatic and continuous separation
- ◇ Easily integrated into existing processing systems




Call us for Expert Support of Dings Co. Equipment - Regardless of its Age

Dings Magnetic Head Pulley Strength Series

Dings Magnetic Head Pulleys are non-electric, self-cleaning magnetic separators. They operate as head pulleys on conveyors to separate tramp iron and iron impurities from materials conveyed in bulk form. They are designed for machinery protection and product

purification. Our magnetic head pulley's magnetism is produced by an internal ceramic magnet assembly that is enclosed with a nonmagnetic stainless steel shell. Magnetic Head Pulleys come shipped ready to install!

Standard Series

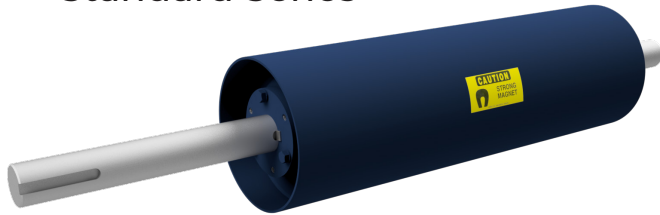


Dings Standard Model Magnetic Head Pulley

has diameters from 6 inches through 24 inches with welded construction.

Options: Vulcanized lagging, herringbone grid, chevron groove, diamond groove, rough top lagging, shaft modifications, tape (safety walk) lagging, taper lock™ hubs and bushings, XT® hubs and bushings, custom designs.

Heavy-Duty Series

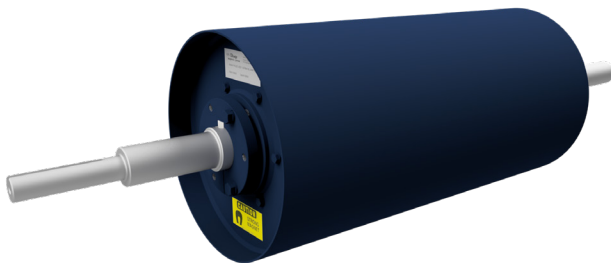


Dings Heavy Duty Model Magnetic Head Pulley

has diameters from 12 inches through 42 inches with welded construction.

Options: Vulcanized lagging, herringbone grid, chevron groove, diamond groove, rough top lagging, shaft modifications, tape (safety walk) lagging, taper lock™ hubs and bushings, XT® hubs and bushings, custom designs.

DFC Series

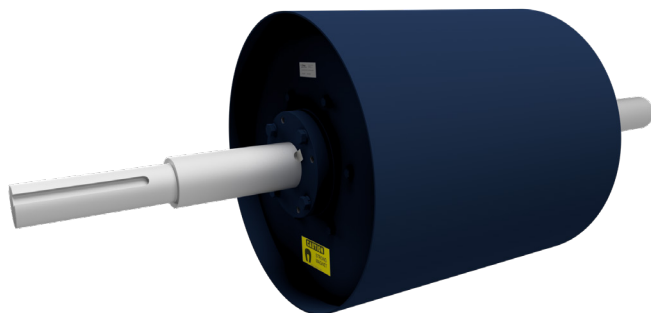

Dings DFC Ultra Model Magnetic Head Pulley

has the greatest depth of magnetic field. It is designed with our Dings Flux Control (DFC) Circuit, which eliminates leakage in between magnetic poles. The overall strength of the magnetic field is stronger, extends deeper and is more uniform. The DFC Ultra Model has diameters from 12 inches through 42 inches with welded construction

Options: Vulcanized lagging, herringbone grid, chevron groove, diamond groove, rough top lagging, shaft modifications, tape (safety walk) lagging, taper lock™ hubs and bushings, XT® hubs and bushings, custom designs.

Magnetic Head Pulley Operation & Strength


Since every application has its own specific needs regarding the magnetic depth of field required, Dings Company Magnetic Group is the only company to offer you three different magnetic strengths.

Dings Standard 8", 12" 15" 18" 20" & 24" Diameters

Dings Heavy Duty 12", 15", 18", 20", 24", 30", 36" & 42" Diameters

Dings DFC Ultra 12", 15", 18", 20", 24", 30", 36" & 42" Diameters

Head Pulley Material Trajectory

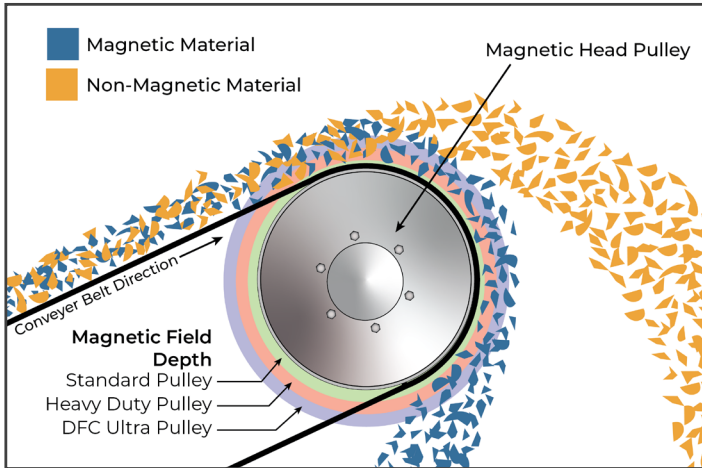


Dings Lagging Options


Herringbone Lagging



Diamond Lagging

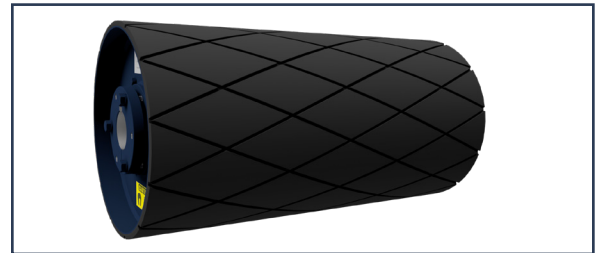


Chevron Lagging

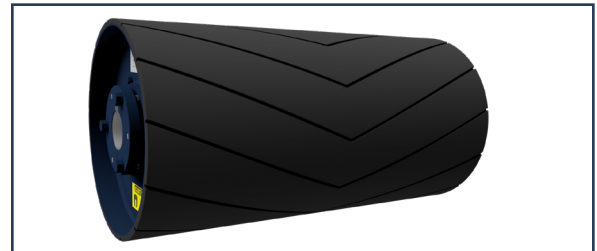

3M Safety Walk Lagging



Rough Top Lagging

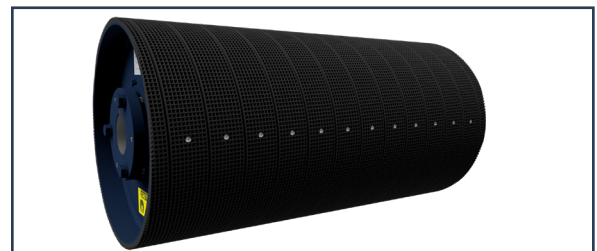

Dings Flux Control (DFC) Circuit

Dings Flux Control (DFC) Circuit design eliminates internal leakage between magnetic poles and improves separating performance. Other 'conventional' magnetic circuits contain air or filler material between the magnetic poles; this allows flux (magnetism) to escape (leak out) and be wasted. In Dings DFC design - blocking magnets are strategically positioned in the spaces between the magnetic poles. These redirect the flux outward, into your product, converting the wasted flux into working force - making the magnet more efficient.


Dings DFC Design improves the overall performance of the magnet in 3 ways

- ◇ The magnetic field is stronger
- ◇ The magnetic field extends deeper
- ◇ The magnetic field pattern is more uniform




On Magnetism
for all Permanent
Magnets

Conventional Magnetic Circuit
With "filler" between the poles



leakage

Dings Magnetic Circuit
with blocking magnets
between the poles



No leakage




Dings_{CO.} magnetic group



Providing Quality Magnetic Solutions for Over 125 Years

www.dingsmagnets.com | magsales@dingsco.com | (414)672-7830

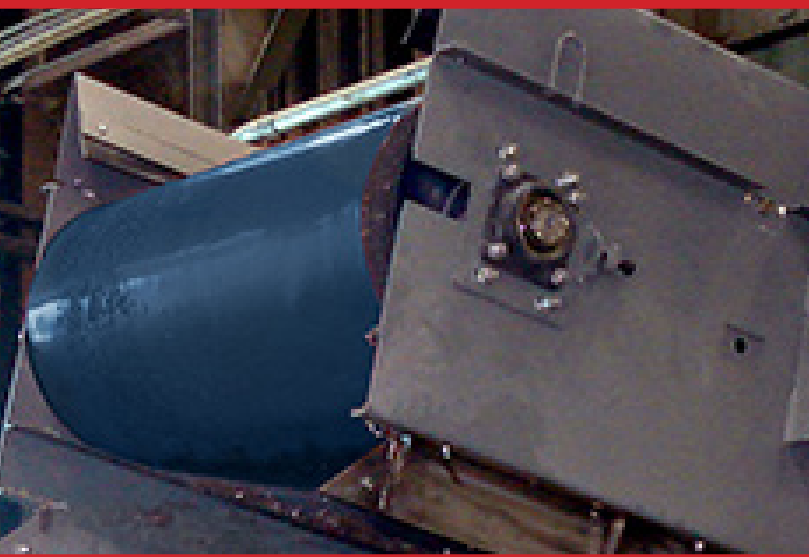

Engineering Driven - Customer Service Focused

 **Dings**_{CO.}
magnetic group

Powerful Magnetic Products Since 1899

Dings Company Magnetic Group engineering and sales staff work together from our Milwaukee, WI factory to provide outstanding customer service from experts in magnetic separation. We listen to our customers to gain an understanding of their needs and apply our experience in their trade to provide magnetic separation equipment that is sized and positioned for the best possible performance in their specific application.