

## Overhead Stationary Electromagnet

- ◇ Balanced Magnetic Circuit for maximum efficiency and equal distribution of length, width and depth of magnetic circuit
- ◇ Maintenance-free with no moving parts (apart from cooling oil changes as necessary)
- ◇ CSA approved and hazardous location models available
- ◇ Stainless steel bottom and center wear plate provides extra protection in the main impact area

### Dings Stationary Electromagnet




The Dings stationary electromagnet is used in applications when separation of ferrous metal is critical but not continuous. Ferrous metal collected by the stationary electromagnet is removed as necessary by cutting power to the magnet releasing the ferrous material.

### Dings Electromagnetic Rectifier

All electromagnets require a DC power supply. Rectifiers convert alternating current (AC) from your local power source to the necessary direct current (DC) needed by electromagnets.

### Anodized Aluminum Strap Coils

Dings electromagnetic coils are wound with an anodized aluminum strap— an exclusive design that generates more magnetism than any other on the market and exceeds Class H insulation rating! This design outlasts and out-performs copper wire with polymer insulation or bare aluminum with Nomex® insulation.

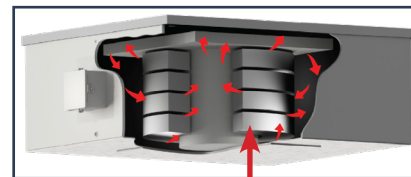

Oil Flow =  Anodized Aluminum Strap



**20-Year Warranty on Coil Burnout**

### Dings Electromagnetic Coils

- ◇ No insulation is needed with anodized aluminum straps—eliminating the major cause of coil failure (insulation breakdown)
- ◇ More magnetism and separating power - generated by extra turns
- ◇ Each turn is exposed to oil-cooling - assuring a stronger, more efficient magnet
- ◇ Eliminates the need for external oil expansion pipes or tanks that require maintenance and can be damaged




- ◇ Maintenance-free
- ◇ Overload capacity for short infrequent periods
- ◇ Corrosion protection in extreme environments

### Over the Head Pulley Position



### Over the Conveyor Position

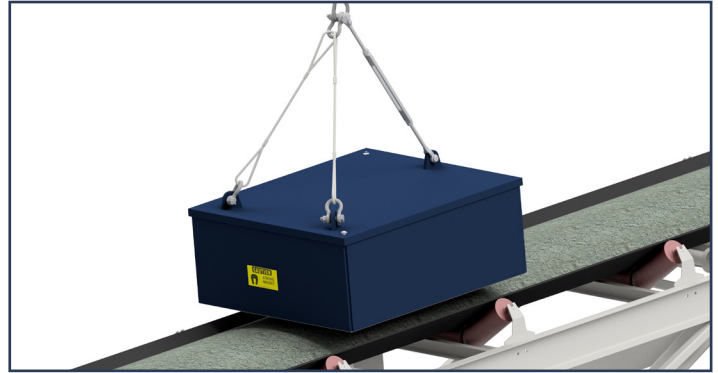

Note: Over the head pulley positioning produces the best magnet performance because the material becomes airborne, liberating the tramp metal, making it easier to separate. Inline sometimes permits use of a smaller magnet compared to crossbelt positioning. The Magnet is cleared of metal by cutting the power.

Note: Over the conveyor positioning is commonly used when over the head pulley positioning isn't feasible due to the process. Stationary over the conveyor magnets are cleared of tramp metal by cutting the power. This can be done over the belt or the magnet can be moved laterally using a trolley to facilitate collection in a bin adjacent to the conveyor for tramp metal collection.

## More Dings Company Magnetic Separation Equipment


**Overhead Stationary Permanent Magnet**  
Lifetime warranty on magnetism



**Magnetic Head Pulley**  
Available in 3 different strength series



**Eddy Current Separator**  
Separate non-ferrous metal

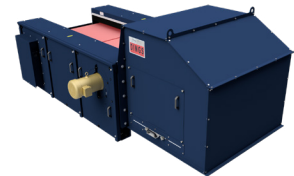

**Overhead Self-Cleaning Electromagnet**



**MRF (Material Recovery Facility) Overhead Self-Cleaning Electromagnet**  
3" high cleats



**Deep Draw Drum Magnet**



ver.1/25

# Engineering Driven - Customer Service Focused



Dings Company Magnetic Group engineering and sales staff work together from our Milwaukee, WI factory to provide outstanding customer service from experts in magnetic separation. First, we listen to our customers to gain an understanding of their needs. Then we apply our experience in their trade to provide magnetic separation equipment that is sized and positioned for the best possible performance in their specific application.